

POWERLOK®

Rack Power Distribution

Greater Reliability

- Automated soldering from line input to each receptacle eliminates all types of mechanical connections.
- Independently evaluated to have 270% greater reliability over rack PDUs with mechanical terminations.

Universal Cord Locking

- CordLok universal cord locking with an industry leading receptacle density secures C13 and C19 cords.
- Single hand insertion/removal.
- No insertion resistance.
- Clicks when fully inserted.
- Use standard cords.
- Roll wheel with thumb to remove cord.
- \$1 per receptacle.



Slim Modern Vertical Design

- Only 2.18" wide x 2" deep.
- Greatest receptacle density.
- Highly visible group marking.
- Low profile receptacles protected from impact.
- Colors applied to cover at no cost on orders greater than 24 units.




Multi-Pack Packaging

- Reduced shipping costs and packaging waste.
- Four rack PDUs with up to 40' of cord in a small 22" x 5" package.
- 96 units per pallet for efficient handling at 65" stack height.
- Low profile receptacles protected from impact.
- 2-pack design for easy shipment of one or two units.

Angled Input Whip

- Input cord is angled toward the server rack exit to improve access to rear of server.
- Whip exit overhead or underfloor.
- Simple fixed and rigid design.
- Reduces bend radius.
- Natural egress from server cabinet.
- Improves access to IT equipment.
- Allows greater length PDU with more receptacles over PDUs with end cords.

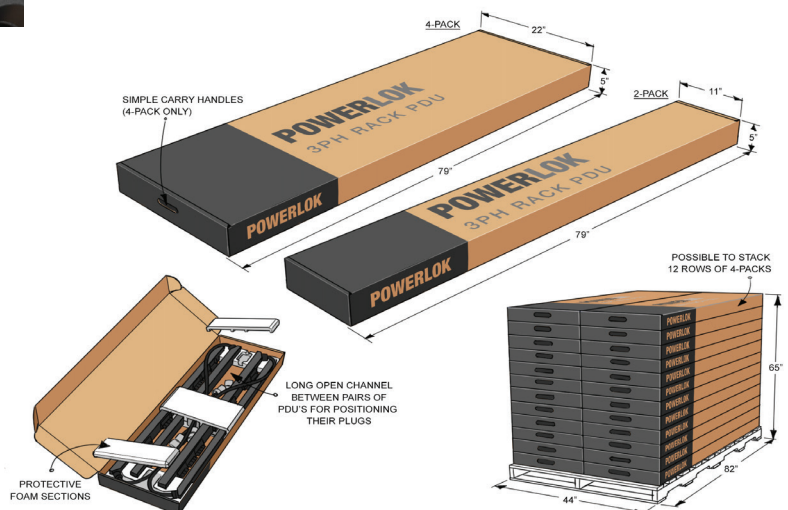

Web-Based PowerLok CPQ (Configure-Price-Order)

PowerLok Vertical Rack PDU

Build Model Number **PL01A04A07C-201**

Power Type 20A 120/208VWYE ▾

PDU Length (IN) 72 ▾

PDU Color CARBON ▾

Plug Type L21-20P ▾

Whip Length (FT) 7 ▾

C13 Quantity 36 ▾

C19 Quantity 6 ▾

CordLok (for C13/C19) YES ▾

120V 5-15R Quantity 0 ▾

Power Monitoring REMOTE & UNIT DISPLAY ▾

- Build a rack PDU and receive in 2 weeks on orders greater than 24 units.
- Easy to use — build your PDU online.
- 3D image and specification for your build.
- CAD model downloads.
- Pricing and order entry.

Simplified User Interface

MAIN		GROUP		LINE			PF / VOLTS			ADMIN	
GROUP	POWER	kW kVA		AMPS	kW	kVA	LINE	GROUP	PF	VOLTS	Serial Number
AMPS	TOTAL	1	2	A	B	C	PF	PF	VOLTS	IP Address	
1	10.3	2.09	2.13	20.7	2.48	2.48	1.00	1	0.99	207	20G01190001
2	10.3	2.09	2.13	19.8	2.30	2.36	0.98	2	0.98	207	Firmware Ver: 1.0.0
3	10.8	2.25	2.25	17.1	2.03	2.05	0.99	3	1.00	208	Boot Load Ver: 1.10.2
TOTAL		6.90								198.168.2.100	
		kVA								MAC Address: E0:1B:23:CD:45	
										Internal Temp: 37C	

- Advanced monitoring and touchscreen display.
- No failures from faulty push buttons.
- Easy daisy chain network communications.
- Alarms present in red for visibility.
- Internal temperature reporting.

Delivery Options

- 36 select models ship next day.
- 8,400+ built models ship in 10 – 14 days.



Designer and Manufacturer
888.982.7800
www.upsite.com